




Customer:	Hilong Oil Services & Engineering	Date Of Service:	01-03-2024
Type Of Inspection:	CAT III INSPECTION	Report No:	ATS-02-24-2999-SJE-009
Rig & Rig Number:	RIG-100	Specification:	API RP 8C



ABERDEEN Technical Services Would Like to Thank You for Giving Us the Opportunity to Work With Your Honorable Company

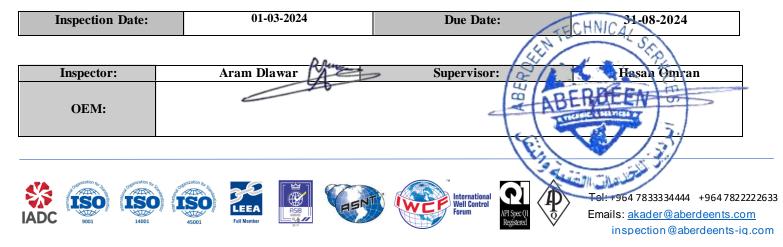






Customer:	Hilong Oil Services & Engineering	Date Of Service:	01-03-2024
Type Of Inspection:	CAT III INSPECTION	Report No:	ATS-02-24-2999-SJE-009
Rig & Rig Number:	RIG-100	Specification:	API RP 8C

The Rig Was Equipped with JIANGSU RUTONG PETRO-MACHINETRY CO. Single Joint Elevator, <u>with The Following</u> <u>Specification:</u>

Equipment:	Single Joint Elevator, SJ 4-5
SN:	808106
Date of Manufacture:	-
Manufacturer/ Model:	JIANGSU RUTONG PETRO-MACHINETRY CO.
Reference Standard:	API RP 8C
Next Examination Date:	After 6 Months

Remarks:

Detailed reports are attached detailing all readings and results in - 03 of 04 pages.

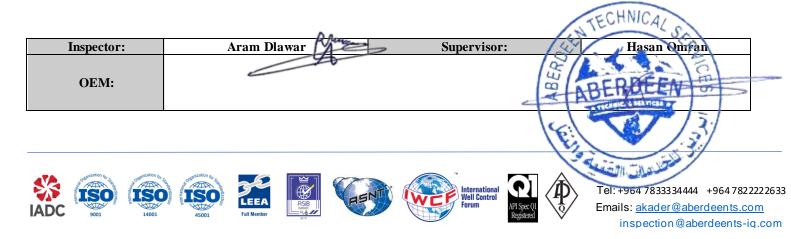







Customer:	Hilong Oil Services & Engineering	Date Of Service:	01-03-2024
Type Of Inspection:	CAT III INSPECTION	Report No:	ATS-02-24-2999-SJE-009
Rig & Rig Number:	RIG-100	Specification:	API RP 8C

PROCEDURE	
> The Single Joint Elevator Has Been Inspected and Found Conformable to the	
➢ The Rig was equipped with JIANGSU RUTONG PETRO-MACHINETRY C	CO. LTD Single Joint Elevator.
Single Joint Elevator Found Stripped Down for CAT III Inspection.	
Action	Result
Visually check for the serial number and Identification	Pass
Prepare and clean the elevator body and accessories to the extent necessary for	or inspection. Pass
Visually check for any damage, missing parts of cracks	Pass
Visually check & MPI as per manufacture's recommendations	Pass
• Measure the wear of Top & bottom bores, center latch, and link ears etc. as pe	r manufacture's Pass
recommendations.	Fass
Repaint the Elevator	Pass
Prepare and submit the inspection report.	Pass





OREINTATION	DESCRIPTION	VALUES	OEM VALUES	RESULT
RIGHT	The maximum allowable wear tolerance of (D)	19.8mm	18.5 mm	Accepted
LEFT	The maximum allowable wear tolerance of (D)	19.5 mm	18.5 mm	Accepted
TOP	Maximum Allowable (Worn) Load Shoulder Bore TB	104.5 mm	105.13 mm Max	Accepted
BOTTOM	Maximum Allowable (Worn) Load Shoulder Bore BB	104.90 mm	105.13 mm Max	Accepted

** Visual And MPI Was Carried out on the critical areas and load bearing components of the elevator and Found Satisfactory for Further Use.

** CAT III Inspection Was Carried Out on the Elevator and Found Accepted At The Time of Inspection

	<u> </u>	TECHNICAL
Inspector:	Aram Dlawar	Supervisor: Hasan Omran
OEM:	4	ABERDEEA
		Tel. +964 782334444 +964 7822222633 Well Control Forum For





Customer:	Hilong Oil Services & Engineering	Date Of Service:	01-03-2024
Type Of Inspection:	CAT III INSPECTION	Report No:	ATS-02-24-2999-SJE-009
Rig & Rig Number:	RIG-100	Specification:	API RP 8C

Visual & Magnetic Particles Examination Report

Client Name: Hilong Oil Services & Engineering		eering	Location:	R114	Job Number:	ATS-02-24-2999	
Date of Examination:		01-03-2024	Date	of Report:	01-03-2024	Certificate No:	ATS-02-24-2999- SJE-009-1

Serial Nu	mber De	Description of the examined equipment Result						
80810	6	Single Joint Elevator, SJ 4-5 Pass						
S/N:		808106						
				- 5	¥ 808106			
		NDT Equipment De	tails					
Standard	API RP 8C & ASTM E 709	Viewing Condition:	Colored Media	Method	WET			
Yoke	AC	Serial No:	201504044	Due Date	04-07-2024			
White Contrast	FLUXO: WCP-4	Batch No:	L230523/1	Due Date	23-05-2028			
Black Ink	FLUXO: Black magnetic ink-3	Batch No:	L230125/3	Due Date	25-1-2025			
		NDT procedure						
Visual a	nd MPI carried out for the abov				-			
	Identification of any part f							
Pa	rticulars of any repair, renewal	or alteration required to	remedy the defect i	dentified above	: None			
	vel II Inspector Name:	Signature & S	tamp:	Date of Next T	hrough Examination:			
ABERICEA OF 28-08-2024								



Tel: +964 7833334444 +964 7822222633 Emails: <u>akader@aberdeents.com</u> inspection@aberdeents-iq.com