



ABERDEEN TECHNICAL SERVICES AND GENERAL TRANSPORTATION

SINGLE JOINT ELEVATOR - CAT IV INSPECTION REPORT



Customer:	Hilong Oil Services & Engineering	Date Of Service:	05-08-2024
Type Of Inspection:	CAT IV INSPECTION	Report No:	ATS-08-24-4132-SJE-003
Rig & Rig Number:	RIG-100	Specification:	API RP 8B



ABERDEEN Technical Services Would Like to Thank You for Giving Us the Opportunity to Work With Your Honorable Company

Inspection Date:	05-08-2024	Due Date:	04-08-2025
------------------	------------	-----------	------------

Inspector:	Aram Dlawar	Supervisor:	Hasan Oran
OEM:			



International Well Control Forum



Tel: +964 7833334444 +964 7822222633
Emails: akader@aberdeents.com
inspection@aberdeents-iq.com



Customer:	Hilong Oil Services & Engineering	Date Of Service:	05-08-2024
Type Of Inspection:	CAT IV INSPECTION	Report No:	ATS-08-24-4132-SJE-003
Rig & Rig Number:	RIG-100	Specification:	API RP 8B

The Rig Was Equipped with JIANGSU RUTONG PETRO-MACHINERY CO. Single Joint Elevator, with The Following Specification:

Equipment:	Single Joint Elevator, SJ 3 ½ - 5
SN:	808108
Date of Manufacture:	-
Manufacturer/ Model:	JIANGSU RUTONG PETRO-MACHINERY CO.
Reference Standard:	API RP 8B
Next Examination Date:	After 1 Year

Remarks:

Detailed reports are attached detailing all readings and results in - 03 of 06 pages.

Inspector:	Aram Dlawar	Supervisor:	Hasan Omran
OEM:			

International
Well Control
Forum

Tel: +964 7833534444 · +964 7822222633

Emails: slader@aberdeents.cominspection@aberdeents-iq.com



Customer:	Hilong Oil Services & Engineering	Date Of Service:	05-08-2024
Type Of Inspection:	CAT IV INSPECTION	Report No:	ATS-08-24-4132-SJE-003
Rig & Rig Number:	RIG-100	Specification:	API RP 8B



PROCEDURE

- The Single Joint Elevator Has Been Inspected and Found Conformable to the Relevant Standard(s)
- The Rig was equipped with **JIANGSU RUTONG PETRO-MACHINERY CO. LTD** Single Joint Elevator.
- Single Joint Elevator Found Stripped Down / Disassembled for CAT IV Inspection.

Action

Result

• Visually check for the serial number and Identification	Pass
• Dismantle the elevator as far as possible into single components	Pass
• Prepare and clean the elevator body and accessories to the extent necessary for inspection.	Pass
• Visually check for any damage, missing parts or cracks	Pass
• Visually check & MPI as per manufacture's recommendations	Pass
• Visually check for damage, deformation or cracks on the hinge's Ears, handles, Critical areas & hinges	Pass
• Measure the wear of bores, and ear thickness as per manufacture's recommendations.	Pass
• Visually check after Reassemble the Elevator with new spring and spare parts.	Pass
• Repaint the Elevator	Pass
• Prepare and submit the inspection report.	Pass

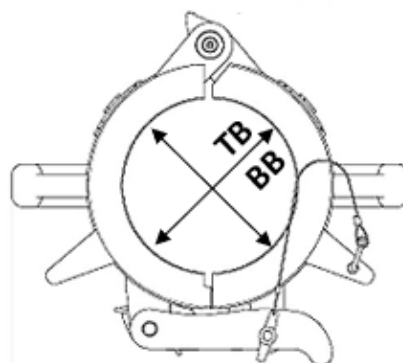


OREINTATION	DESCRIPTION	VALUES	OEM VALUES	RESULT
RIGHT	The maximum allowable wear tolerance of (D)	20mm	18.5 mm	Accepted
LEFT	The maximum allowable wear tolerance of (D)	19 mm	18.5 mm	Accepted
TOP	Maximum Allowable (Worn) Load Shoulder Bore TB	98.2 mm	99.61 mm Max.	Accepted
BOTTOM	Maximum Allowable (Worn) Load Shoulder Bore BB	98.1 mm	99.61 mm Max.	Accepted








Customer:	Hilong Oil Services & Engineering	Date Of Service:	05-08-2024
Type Of Inspection:	CAT IV INSPECTION	Report No:	ATS-08-24-4132-SJE-003
Rig & Rig Number:	RIG-100	Specification:	API RP 8B

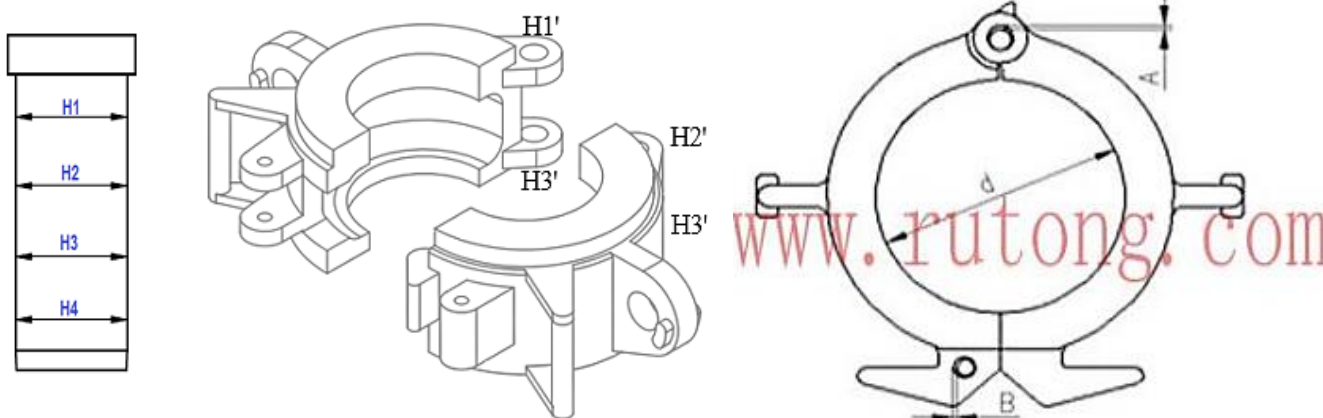

Measurement	Nominal	Tolerance (A)	Actual Reading	Result
Hinge Pin OD (H1)	19.92	0.64	19.89	Accepted
Hinge Pin OD (H2)	19.92		19.88	Accepted
Hinge Pin OD (H3)	19.92		19.89	Accepted
Hinge Pin OD (H4)	19.92		19.89	Accepted
Hinge Hole ID (H1')	20		20.02	Accepted
Hinge Hole ID (H2')	20		20.03	Accepted
Hinge Hole ID (H3')	20		20.05	Accepted
Hinge Hole ID (H4')	20		20.04	Accepted



Customer:	Hilong Oil Services & Engineering	Date Of Service:	05-08-2024
Type Of Inspection:	CAT IV INSPECTION	Report No:	ATS-08-24-4132-SJE-003
Rig & Rig Number:	RIG-100	Specification:	API RP 8B

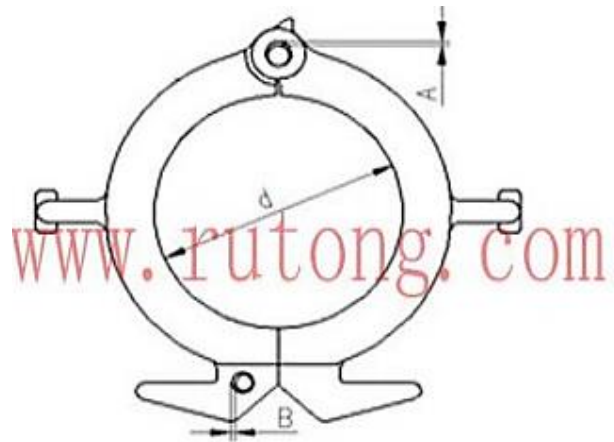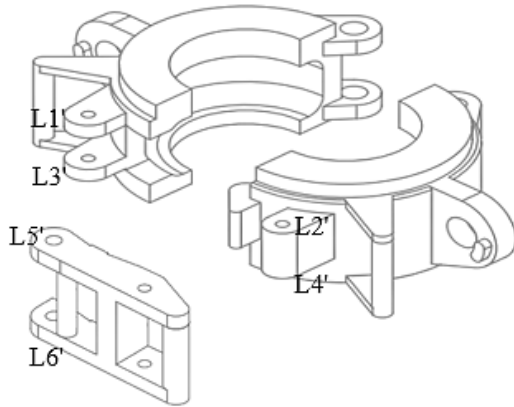

Measurement	Nominal	Tolerance (B)	Actual Reading	Result
Latch Pin OD (L1)	14.86	0.64	14.68	Accepted
Latch Pin OD (L2)	14.86		14.66	Accepted
Latch Pin OD (L3)	14.86		14.67	Accepted
Latch Pin OD (L4)	14.86		14.68	Accepted
Latch Pin OD (L5)	14.86		14.69	Accepted
Latch Pin OD (L6)	14.86		14.65	Accepted
Latch Hole ID (L1')	15.00		15.02	Accepted
Latch Hole ID (L2')	15.00		15.03	Accepted
Latch Hole ID (L3')	15.00		15.02	Accepted
Latch Hole ID (L4')	15.00		15.01	Accepted
Latch Hole ID (L5')	15.00		15.03	Accepted
Latch Hole ID (L6')	15.00		15.02	Accepted

** Visual And MPI Was Carried out on the critical areas and load bearing components of the elevator and Found **Satisfactory for Further Use**.

** CAT IV Inspection Was Carried Out on the Elevator and Found **Accepted**
At The Time of Inspection

Inspector:	Aram Dlawar	Supervisor:	Hasan Omran
OEM:			



Tel: +964 7833334444 +964 7822222633
Emails: akader@aberdeents.com
inspection@aberdeents-iq.com




Customer:	Hilong Oil Services & Engineering	Date Of Service:	05-08-2024
Type Of Inspection:	CAT IV INSPECTION	Report No:	ATS-08-24-4132-SJE-003
Rig & Rig Number:	RIG-100	Specification:	API RP 8B

Visual & Magnetic Particles Examination Report

Client Name:	Hilong Oil Services & Engineering	Location:	HL-100/ R026	Job Number:	ATS-08-24-4132
--------------	-----------------------------------	-----------	-----------------	-------------	----------------

Date of Examination:	05-08-2024	Date of Report:	05-08-2024	Certificate No:	ATS-08-24-4132-SJE-003
----------------------	------------	-----------------	------------	-----------------	------------------------

Serial Number	Description of the examined equipment	Result
808108	Single Joint Elevator, SJ 3 1/2 - 5	Pass
S/N:	-	

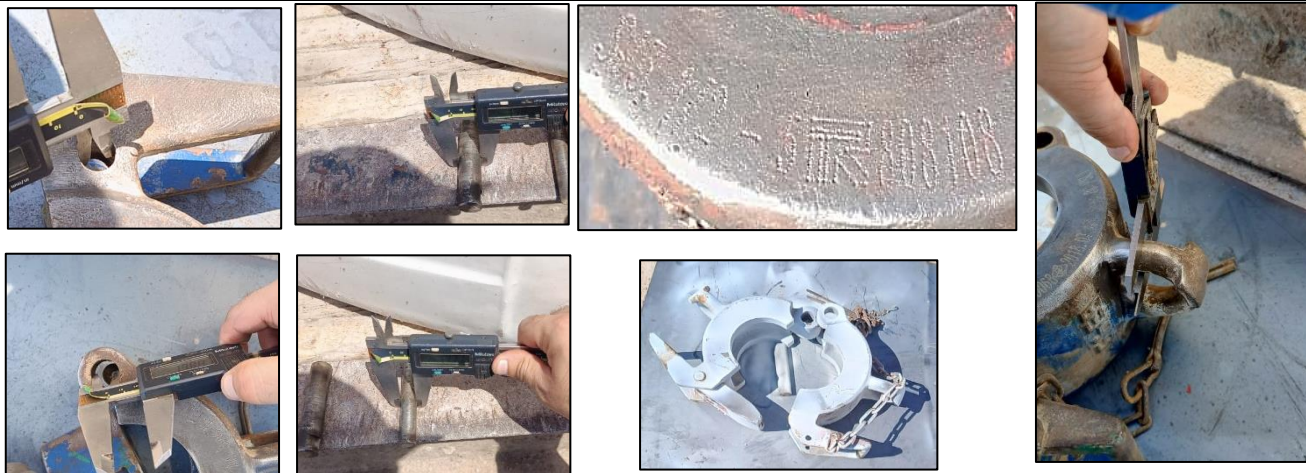

NDT Equipment Details

Standard	API RP 8B – CAT IV & ASTM E 709	Viewing Condition:	Colored Media	Method	WET
Yoke	Ac yoke	Serial No:	201504044	Due Date	27-12-2024
White Contrast	FLUXO: WCP-4	Batch No:	L230523/1	Due Date	23-05-2028
Black Ink	FLUXO: Black magnetic ink-3	Batch No:	L230125/3	Due Date	25-1-2025

NDT procedure

Visual and MPI carried out for the above description and found free of surface defects at the time of inspection

Identification of any part found to have a defect and a description of the defect: **None**

Particulars of any repair, renewal or alteration required to remedy the defect identified above: **None**

ASNT Level II Inspector Name:	Signature & Stamp:	Date of Next Through Examination:
Aram Dlawar		04-08-2025

